

MEMS Capacitive Accelerometers

Data sheet

SF1500S.A / SF1500SN.A

30S.SF1500A.E.06.10

Features

Best in class noise level of 300 ng_{rms}/√Hz
Wide dynamic range of 120 dB (100Hz BW)
DC to 1500 Hz frequency response
± 3g full scale
Analog servo accelerometer
Self test input

Applications



Seismic sensing
 Earthquake detection
 Geophysics
 Homeland and border security
 Strong motion
 Railway technology
 Structural monitoring

Description

The SiFlex™ accelerometer has been designed and developed by Colibrys for “strong motion” seismic sensing applications. This MEMS capacitive product is the best in class “digital geophone”, largely used for seismic and vibration sensing when extremely low noise measurement is required. Features such as wide dynamic range, excellent bandwidth, low distortion, high shock tolerance, and thermal stability make it ideal for strong motion applications such as earthquake and seismology measurements, homeland and border security or structure monitoring.

The SF1500 operates from a bipolar power supply voltage that can range from ± 6V to ± 15V with a typical current consumption of 12mA at ± 6V. The linear full acceleration range is ± 3g with a corresponding sensitivity of 1.2V/g. The SF1500S.A and SF1500SN.A can operate over a wide temperature range from -40°C to +85°C and can withstand a shock of up to 1500g without performance degradation. The frequency response over the full scale range is DC to > 1500Hz.

Full scale range	± 3g (with oscillator)	± 3g (without oscillator)
Products	SF1500S.A	SF1500SN.A

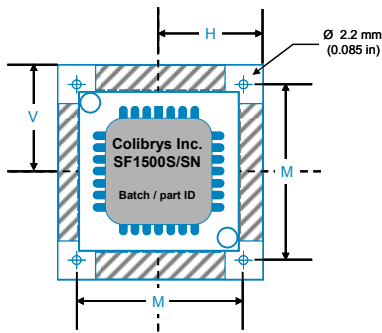

Typ. values

Typ. values	Inch	mm
A	0.98	25.0
B	0.65	16.5
C	0.67	17.4
D	0.46	11.7
E	0.07	1.78
F	0.22	5.6
G	0.19	4.8
H	0.49	12.5
M	0.78	19.8
V	0.49	12.5

Specifications

All values are specified at +20°C (+68°F) and ±6 to ±15VDC supply voltage, unless otherwise stated

	Units	SF1500S.A / SF1500SN.A
Linear output range	g peak typ.	± 3
Sensitivity	V/g (differential)	1.2 ± 0.1 (2.4 ± 0.2)
Frequency response [1]	Hz	DC to 1500
Dynamic range (100 Hz BW)	dB min.	120
Noise (10 to 1000 Hz)	ng _{rms} /√Hz typ. (max.)	300 (500)
Cross-axis rejection	dB	> 46
Shock limit (0.5 ms ½ sine)	g peak	1500
Operating temperature range	°C	-40 to +85
Sensitivity temperature coefficient	ppm/°C (re: ±1g) typ.	250
DC offset	mV max.	±200
Input Resistance of Offset adjustment pin	KΩ	10
Offset thermal coefficient	μg/°C (re: ±1g) typ.	-200
Linearity error	% Full scale (re: ±1g)	±0.833
Input voltage	Volts DC	±6 to ±15
Quiescent current @ 6 VDC	mA typ.	11.7



[1]: The bandwidth is defined as the frequency band for which the sensitivity has decreased by less than 3dB.

Block diagram and electrical connections

Both the (+) and (-) power supplies must be applied simultaneously to the input pins (within 50 ms). The power supply should have less than 100 $\mu\text{V}/\sqrt{\text{Hz}}$ noise in order to avoid the possibility of adding noise to the output of the sensor. The ASIC and on-board electronics operate on $\pm 5\text{V}$ DC provided by internal power conditioning circuitry, reducing the effects of power supply variations on sensor operation. The input power supply connections are reverse polarity protected by a diode bridge. Should reverse polarity power be applied, the unit will self-correct and start normally.

The output of the Si-Flex accelerometer is fully buffered and ready to connect to common inputs found on many analog to digital converters, oscilloscopes and digital multi-meters. The nominal output impedance for the Si-Flex accelerometers is typically 10 Ohms. The connector reference for the SF1500 is a Samtec part no. FTSH-105-01-L-DV-K-P-TR (Header, 2X5, 1.27mm (0.05 in), SMD).

Electrostatic discharge (ESD) damage can occur when Si-Flex accelerometers are improperly handled,

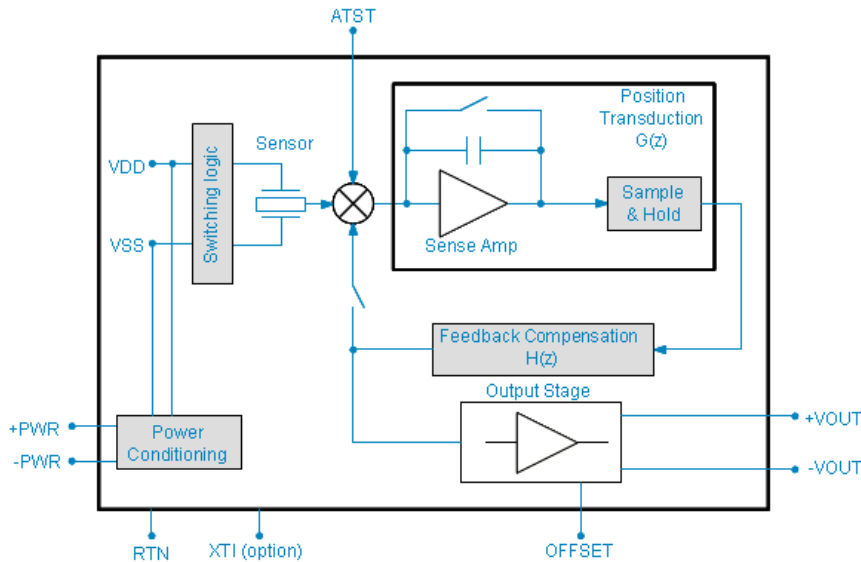

Typ. values	Inch	mm
A	0.49	12.2
B	0.24	6.2
C	0.20	5.1
D	0.36	9.2


Electrical connections

PJ1-1	-Vout	Inverted output signal
PJ1-2	+Vout	Output signal
PJ1-3	ATST *	Sensor self test input
PJ1-4, PJ1-8	RTN *	Signal return (common)
PJ1-5	OFFSET *	Used to remove DC offset
PJ1-6	XTI *	Oscillator input. N/C for SF1500S
PJ1-7	RTN	Return
PJ1-9	-PWR	Negative power supply
PJ1-10	+PWR	Positive power supply

* : see SiFlex™ product description for more details

Frequency response and noise

SF1500S/SN Typical Wideband Noise

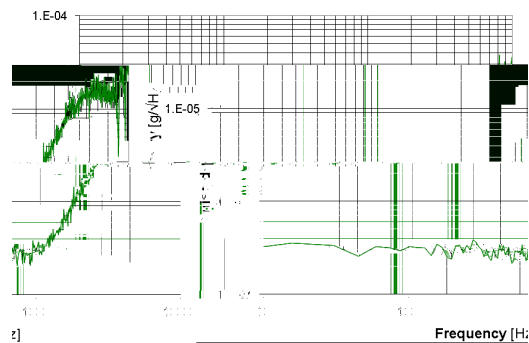

A detailed SiFlex™ Product Description (30D.SFX.x.xx.xx) and further Application Notes are available on demand or on our web site. In order to provide an ideal support to our customers, our standard SF1500S.A and SF1500SN.A products are available

worldwide through a wide network of distributors and agents or directly at Colibrys. Do not hesitate to access our web site for precise contacts or directly Colibrys in Europe or in US for more details.



Colibrys (Switzerland) Ltd
accelero.europe@colibrys.com



Colibrys, Inc.
accelero.us@colibrys.com

www.colibrys.com

Colibrys reserves the right to change these data without notice.