



MEMS Capacitive Accelerometers

Data sheet

HS8000.D

30S.HS8X.F.03.09

Features

Very high shock survivability
Excellent bias stability (incl. post gun hard shock)
± 2g to ± 100g Full scale range
Low cost for advanced specifications
Low power analog voltage output
Brown out protected
LCC 48
Integrated temperature sensor

Applications

Inertial sensing
 IMU / AHRS for MilAerospace
 Smart munition
 Land navigation
 Directional drilling (oil & gas)
 Harsh industrial applications


Description

Colibrys HS8000 accelerometers are advanced products offering a unique solution for applications requiring inertial grade specifications combined with gun hard survivability and very good post shock stability. Thanks to a proprietary MEMS technology and advanced assembly technique, Colibrys offers a dedicated range of products for specific applications in the domains of **inertial** and **tilt / inclination** sensing.

The Colibrys HS8000 accelerometer is a MEMS capacitive sensor, based upon a bulk micro-machined silicon element, a low power ASIC for signal conditioning, a micro-controller for storage

of compensation values and a temperature sensor. The product is low power, calibrated, robust and stable and the electronic configuration provides a solid power on reset and a full protection against brown-out.

Long-term stability of bias and scale factor are typically less than 0.1% of full-scale range. For the ± 2g version (HS8002.D), typical bias temperature coefficient is 100 $\mu\text{g}/^\circ\text{C}$ and scale factor temperature coefficients 100 ppm/ $^\circ\text{C}$.

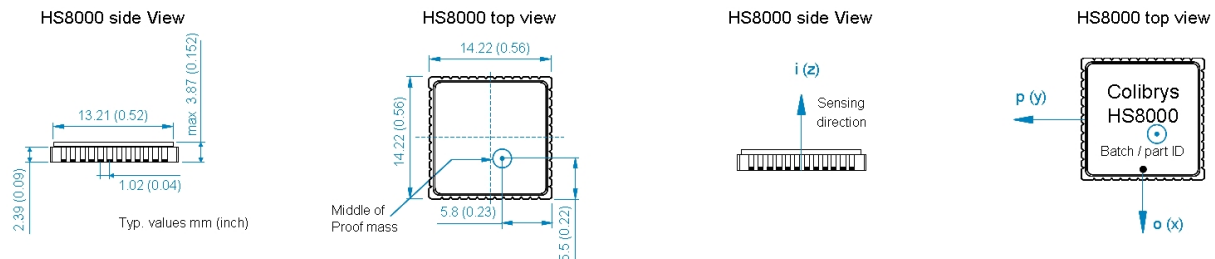

Specifications

All values are specified at +20°C (+86°F) and 5.0 VDC supply voltage, unless otherwise stated

	Units	HS8002.D	HS8030.D	HS8100.D
Full scale range	g	± 2g	± 30g	± 100g
Packaging		LCC 48	LCC 48	LCC 48
Bias calibration	mg	< 10	< 150	< 500
One year bias stability [1]	mg typ. (max.)	1.5 (< 5)	22 (< 75)	75 (< 250)
Switch on/off repeatability	mg max.	< 0.15	< 1.5	< 7.5
Bias temp. coefficient [2]	mg/ $^\circ\text{C}$ typ.	0.1	1.5	3.5
	mg/ $^\circ\text{C}$ max.	± 0.4	± 6	± 20
Post gun hard shock stability [4]	mg	TBC	± 20	TBC
Scale factor sensitivity (K1)	mV/g	1000 ± 8	66.6 ± 1	20 ± 1
One year scale factor stability [1]	ppm typ. (max.)	300 (< 1000)	300 (< 1000)	300 (< 1000)
Scale factor temp. coefficient [2]	ppm / $^\circ\text{C}$ typ.	100	100	100
	min. / max.	-50 / 250	-50 / 250	-50 / 250
Input axis misalignment (Kp, Ko)	mrad max.	< 10	< 10	< 10
Resolution / Threshold (@ 1Hz)	mg max.	< 0.1	< 1.7	< 5.5
Non linearity	% of FS max.	< 0.8	< 0.9	< 1
Bandwidth [3]	Hz	0 to ≥ 200	0 to ≥ 100	0 to ≥ 200
Noise spectral density in band [0 ; 9kHz)	$\mu\text{V}/\sqrt{\text{Hz}}$ typ.	11	11	11
	max.	< 18	< 18	< 18

[1]: One year stability defined according to IEEE 528-2001: turn on / turn on, storage at -55°C and 85°C, -40°C to 125°C T cycling, -55°C to 85°C unpowered harass, vibration and shock

[2]: Temperature coefficients are specified for a range of -40°C to 20°C, where temperature behavior is typically linear.

[3]: The bandwidth is defined as the frequency band for which the sensitivity has decreased by less than 3dB.

[4]: Shock profile (Aerobut) 20'000g, 8ms, half sine

Environmental	HS8002.D	HS8030.D	HS8100.D
Operating temperature range	-55°C to +125°C (-67°F to 255°F)		
Reliability	Results based on MIL-HDBK-217, notice 2, are available on request.		
Shock resistance	20'000 g (8ms half-sine period, shocks in each direction o, p, i)		
Recovery time	< 1ms (1000g, half-sine period 1ms, shocks in direction i)		
Vibration	20 g rms, 20-2000 Hz (random noise, 30 minutes in each direction o, p, i)		
LCC packaging	The product has been qualified according to MIL-STD-883-E. Hermetic sealing is qualified at 5·10 ⁻⁸ atm·cm ³ /s		
ESD sensitivity	Class 2 (requirements MIL-STD-883-E, 1 Method 3015.7), HBM 2kV		
Note:	- LCC must be tightly fixed to the PCB, using the bottom of the housing as reference plan for axis alignment. - See the Application Note "LCC48, mounting and soldering conditions", available on demand or on our web site for more details		

Electrical	
Input voltage (VDD – VSS)	2.5 to 5.5 VDC. The standard voltage for calibration is 5.0 VDC.
Output voltage range	From 0.5 to 4.5 VDC @ 5.0 VDC input voltage (2.5 V ± 10mV at 0g)
Operating current consumption	< 400 µA @ 5.0 VDC
Initialization & reset current consumption	Typ. 1400 µA (max. 1500 µA) @ 5.0 VDC during the initialization phase. Initialization phase is less than 35 ms at room temperature
Reset	The sensor is Brown out protected. A reset occurs when the power supply varies by more than +0.46 V with a slope >380V/s or if the power supply drops below 2.2V. The recovery time is typ. 25 ms (max 35 ms)
Impedance of external components	Min. 50 kΩ at Vout (pin 32) and VAGND (pin 38) Max. 50 pF at Vout (pin 32) and Max. 100 µF at VAGND (pin 38)

Physical	
	Hermetically sealed LCC, 48 pins housing
Weight	Typ. 1.64 grams
Size	Typ. 14.2 x 14.2 x 3.5 mm (0.56 x 0.56 x 0.13 inch) Max. 14.48 x 14.48 x 3.87 mm (0.57 x 0.57 x 0.152 inch)

Temperature sensor:	
Output Voltage at 20°C	Typ: 1.632 V
Sensitivity	Typ: -11.77 mV/°C
Long term stability	Max -0.03°C to +0.09°C (1000h @ 150°C)
Accuracy	± 5°C (From -40°C to 125°C)

Block diagram and electrical connections

It is necessary to use decoupling capacitors [C] of 1µF each between VDD and VAGND and between VAGND and VSS, located as close as possible from the accelerometer.

COG or X7R @ 5% capacitor types are recommended. The VAGND track should also be as short as possible

Pin	Description	Remarks
9	VPP (Colibrys internal calibration pin)	Must be connected to VSS
12	SCK (Colibrys internal calibration pin)	Must be connected to VSS
15	SDA (Colibrys internal calibration pin)	Must be connected to VSS
32	Vout	Accelerometer output signal
36	VSS	Ground
38	VAGND	Accelerometer output reference voltage(VDD/2)
40	VDD	Power supply
42	V0	Temperature sensor output

A detailed MS8000 Product Description (30D.MS8X.x.xx) compatible to HS8000 and further Application Notes are available on demand or on our web site.
As this product is still under qualification, it is only covered by a

preliminary data sheet and only available through Colibrys and

